


# Series **Nebraska**



# Nebraska Maple Mate 30x120 Rc 20mm Antislip

30x120 20MM

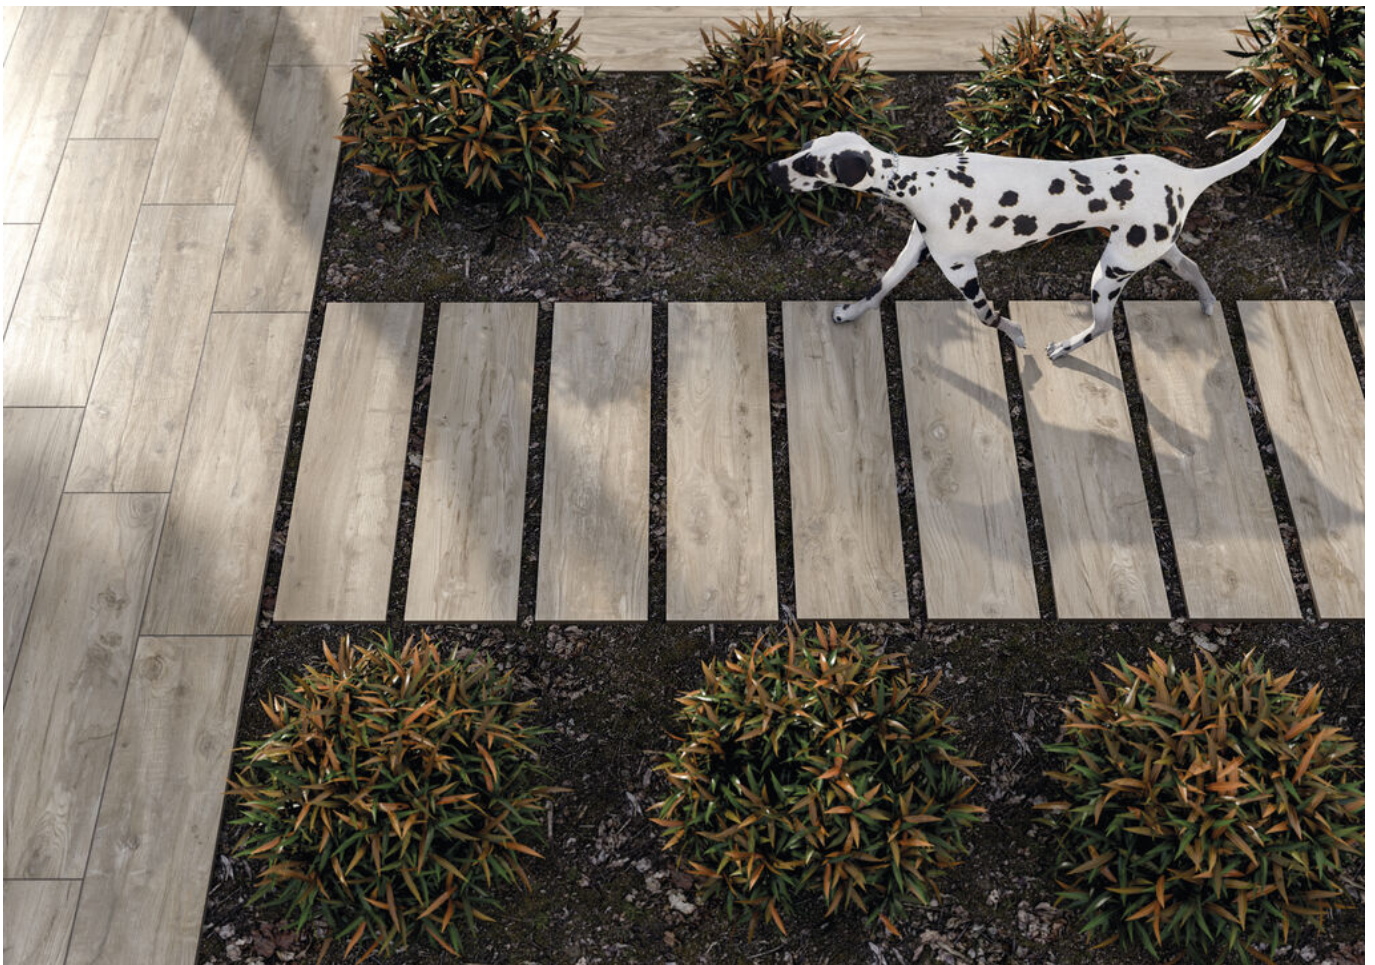

## Technical Data



Series: NEBRASKA  
 Product: Nebraska Maple Mate 30x120 Rc 20mm Antislip  
 Size: 30x120 20MM  
 Sales group G.5178  
 Type: Porcelain tiles

Type of material Neutral Body  
 Slipperness R: R11C  
 Class: Antislip  
 UPEC:  
 Finish: MATT

| Size        | Product type | Pcs/Box | M2/Box | Kg/Box | Boxes/Pallet | M2/Pallet | Kg/Pallet |
|-------------|--------------|---------|--------|--------|--------------|-----------|-----------|
| 30x120 20MM | Field Tile   | 2       | 0,720  | 33,750 | 30,000       | 21,600    | 1012,500  |

Please note: the contents of this packaging list are for guidance only, the contents of the packaging may vary. Please consult our sales staff for the exact list.

Variations



**Variations**



## Technical Data

## Nebraska Maple Mate 30x120 Rc 20mm Antislip



|                  |                             |
|------------------|-----------------------------|
| Family:          | <b>Porcelain tiles MATT</b> |
| Absortion Group: | <b>Bla</b>                  |
| Size:            | <b>30x120 20MM</b>          |
| Worz Size (mm):  | <b>1200 x 298 x 20</b>      |

## PHYSICAL CHARACTERISTICS

| CHARACTERISTICS                               | STANDARD                  | VALUE                     |
|---|---------------------------|---------------------------|
| Dimensional tolerances and surface appearance | UNE-EN-ISO 10545-2        | Complies with the standar |
| Water Absortion                               | UNE-EN-ISO 10545-3        | E<0,5%                    |
| Breaking strenght (N)                         | UNE-EN-ISO 10545-4        | >1300                     |
| Flexural tensile strengthn (N/mm2)            | UNE-EN-ISO 10545-4        | >=35                      |
| Resistance to abrasion (PEI)                  | UNE-EN-ISO 10545-7        | 4                         |
| Thermal shock resistance                      | UNE-EN-ISO 10545-9        | Complies with the standar |
| Cracking resistance                           | UNE-EN-ISO 10545-11       | Complies with the standar |
| Frost resistance                              | UNE-EN-ISO 10545-12       | Complies with the standar |
| Scratch hardness according to Mohs            | UNE-EN-ISO 67101          | 7                         |
| Slipperness resistance   Pendulum             | UNE-EN 16165:2022 anexo C | Clase 3                   |
| Slipperness resistance   Inclined platform    | UNE-EN 16165:2022 anexo B | R11                       |
| Slipperness resistance   Barefoot areas       | UNE-EN 16165:2022 anexo A | C                         |
| Reaction to fire                              | UNE-EN-ISO 13501-1        | A1 - A1 FL                |
| DCOF  | DCOF                      | >0,60                     |

**CHEMICAL CHARACTERISTICS**

| <b>CHARACTERISTICS</b>                               | <b>STANDARD</b>     | <b>VALUE</b>               |
|--|---------------------|----------------------------|
| Resistance to staining                               | UNE-EN-ISO 10545-14 | Complies with the standars |
| Resistrance to chemicals and pool treatment products | UNE-EN-ISO 10545-13 | Complies with the standars |
| Resistance to High concentration acids and bases     | UNE-EN-ISO 10545-13 | MIN HB                     |
| Resistance to Low concentration acids and bases      | UNE-EN-ISO 10545-13 | MIN LB                     |